

7 AH BATTERY

LA.7AH



The 7 AH capacity backup battery is a long life span and strong reliability rechargeable backup power unit.

An ideal backup power supply unit to be used on any devices.

7 AH BATTERY

Feature Highlight

Stagnant acid – enable the rechargeable lead acid to be placed and used discretionarily

Safety, seal – ensure no electrolyte over

No corrosive gas produced

Safe gas release valve door

Long life span

Low self-discharge

Good instauration function

Strong reliability

High capacity


Technical Specification

Nominal Voltage	12 V (6 cells in series)
Nominal Capacity	20 hour rate F.V. (1.75 V/cell)(350 mA to 10.50 V): 7.0 AH 10 hour rate F.V. (1.75 V/cell)(665 mA to 10.50 V): 6.65 AH 5 hour rate F.V. (1.75 V/cell)(1190 mA to 10.50 V): 5.95 AH 1 hour rate F.V. (1.55 V/cell)(4200 mA to 9.30 V): 4.2 AH
Approximate Weight	2.1 kg
Internal Resistance (Fully Charged Battery)	<25 mΩ
Maximum Discharge Current for 5 sec	105 A
Maximum Charge Current (A)	2.1 A
Ambient Temperature	
Charge	0 °C (32 F) ~ 40 °C (104 F)
Discharge	20 °C (-4 F) ~ 50 °C (122 F)
Storage	20 °C (-4 F) ~ 40 °C (104 F)
Vibration Test (2000 cycles/min, 2.5 mm excursion, 2 hrs)	no loss in capacity or performance
Case	ABS
Dimension	151 mm x 65 mm x 100 mm

Ordering Information

LA.7AH

7 AH BATTERY

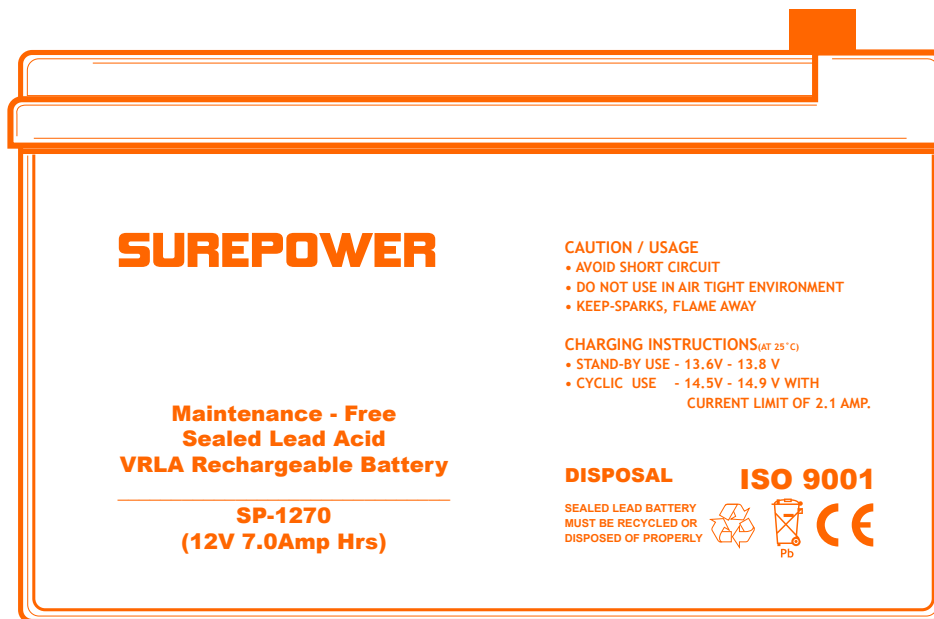

www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman
Industri Puchong, Batu 12 Jalan
Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus
ONE Building, Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

Jl. Raya Lodan No. 2, kompl.
Ruko Lodan Centre Blok. P 10,
Jakarta Utara 14430, Indonesia.
Tel : +62 21 6983 3153
Fax : +62 21 690 3005
Email : info@entrypass.net

A securityhub group company

