



SMPS 350

Power Supply Unit

Features

- Universal Switching Power Supply (4 amp) c/w Casing & Charger Board (AC 110V to AC 240V)


Technical Specification

Functions \ Model	Description
Input voltage	230VAC
Output voltage	13.2VDC
Maximum output current	3A
Regulated output	YES
Voltage low cut-off	YES
Voltage low cut-off threshold	10VDC
Restoration threshold	12VDC
Battery charging terminals	YES (12VDC 7AH)
Fuse protection	YES (AC input and DC)
On board ON/OFF switch	YES

SMPS 350

Power Supply Unit

Dimension

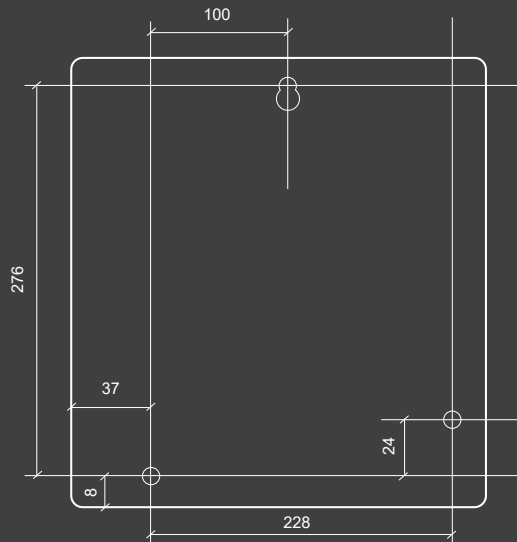

- PG - Mains / Battery Indication
- GND - Ground
- 12V - DC12V, 3.0A Max.
- Is - Battery Charging Current
- Vs - Battery Voltage

Ordering Information

SMPS 350 Universal Switching Power Supply (4 amp) c/w Casing & Charger Board (AC 110V to AC 240V)



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net